able sheet metal

Quality Since 1946

able sheet metal

Corporate Office Location:
614 N. Ford Blvd.
Los Angeles, CA 90022-1107

Shipping & Receiving:
4532 Floral Dr.
Los Angeles, CA 90022-1103

Northern California Location:
14111 Catalina St.
San Leandro, CA 94577-5540

TEL: (323) 269-2181
FAX: (323) 269-2184

TOLL FREE: (800) 699-2253
www.ablemetal.com

TEL: (510) 483-9966
FAX: (510) 483-9960

FIRE-RESISTANT MULTI-GUARD VENT (MGV) FOR EAVE, FOUNDATION, SOFFIT, AND BALCONY SPACES


US PATENT 12,560,351. B2

PRODUCED FROM TOP-QUALITY ASTM A-653 GALVANIZED STEEL. DESIGN ALLOWS FOR HIGH AIR FLOW WITH RESTRICTION OF DIRECT HEAT/FLAME PENETRATION. GUARDED BY 1/8" OR 1/16" GALVANIZED OR STAINLESS STEEL MESH AND INTUMESCENT TAPE. TESTED/CERTIFIED BY FIRE DEPARTMENT APPROVED LAB FOR ASTM E2886 AND E2912 STANDARDS. OTHER STYLES, SIZES, AND MATERIALS (BONDERIZED, STAINLESS STEEL, COPPER) AVAILABLE UPON REQUEST.


PART NUMBER	WIDTH	HEIGHT	VENT AREA	APPX. NFA
4500-MGV16	14"	3"	42 sq in.	**20** sq in.
4780-MGV16	14"	6"	84 sq in.	**35** sq in.
4965-MGV16	120"	3"	360 sq in.	**130** sq in.

***For NFA approximations on any opening size, multiply the length of the vent by its height (excluding any flanges) and take 36% of that value.**


FRONT VIEW

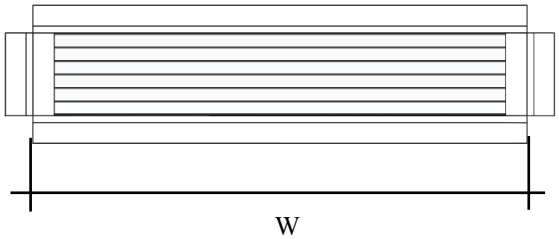

SIDE VIEW

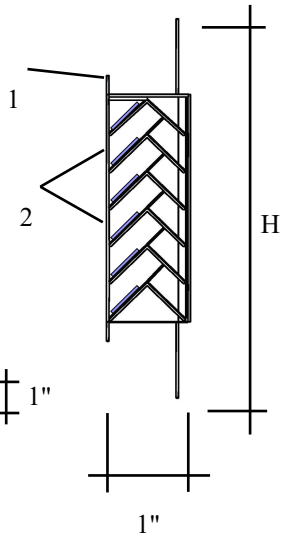


TOP VIEW

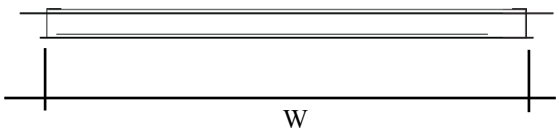

1 - Intumescent Tape

2 - Ember Guards

FRONT 3D VIEW

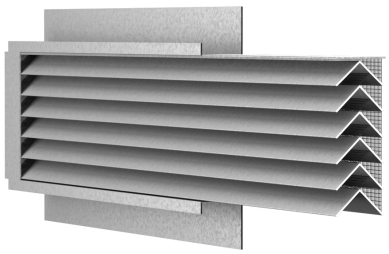

BACK 3D VIEW

