

614 North Ford Blvd.  
Los Angeles, CA 90022




14111 Catalina St.  
San Leandro, CA 90022

Phone: (800)699-2253, Fax in LA: (323)269-2184, Fax in SL: (510)483-9960

## ROOF VENTILATORS

### gravity exhaust

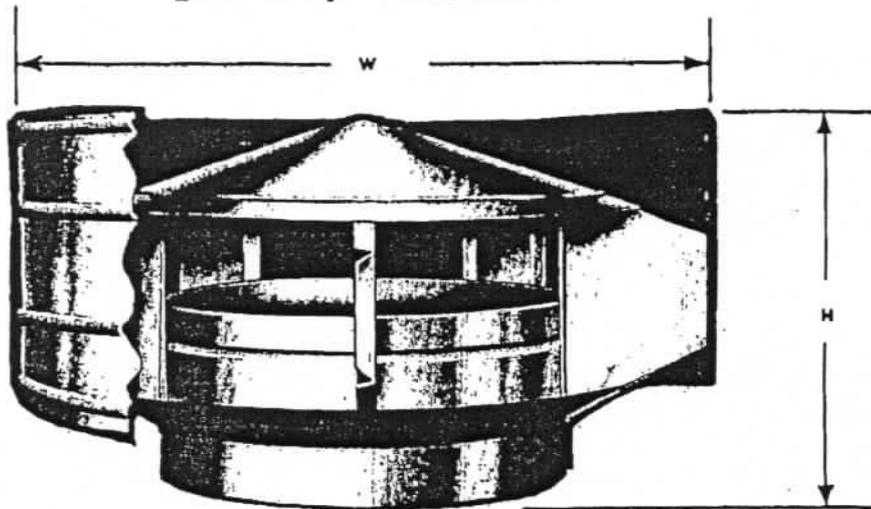

### engineering data:

| Capacity-CFM |        | Throat<br>Size<br>In. | Dimensions<br>In. |     | Galvanized Steel |                  |
|--------------|--------|-----------------------|-------------------|-----|------------------|------------------|
| 5 MPH        | 10 MPH |                       | H                 | W   | Gauge<br>MSG     | Shp.<br>Wt.-Lbs. |
| 68           | 105    | 6                     | 6½                | 10  | 24               | 6                |
| 121          | 184    | 8                     | 8¾                | 13½ | 24               | 8                |
| 189          | 291    | 10                    | 11¼               | 16¾ | 24               | 11               |
| 274          | 416    | 12                    | 13                | 20  | 24               | 14               |
| 374          | 571    | 14                    | 15¾               | 23¾ | 24               | 23               |
| 429          | 653    | 15                    | 16                | 25  | 24               | 27               |
| 487          | 749    | 16                    | 17½               | 26¾ | 24               | 30               |
| 616          | 946    | 18                    | 19¼               | 30  | 24               | 41               |
| 760          | 1166   | 20                    | 20¾               | 33¾ | 24               | 46               |
| 1093         | 1680   | 24                    | 26                | 40  | 24               | 100              |
| 1717         | 2632   | 30                    | 33½               | 50  | 22               | 151              |
| 2463         | 3781   | 36                    | 35                | 60  | 22               | 180              |
| 3352         | 5133   | 42                    | 40¼               | 70  | 20               | 310              |
| 4378         | 6738   | 48                    | 45½               | 80  | 20               | 450              |

\*Meets all requirements for a stationary roof ventilator. Removable top plate. Available with bird and/or insect screens and counterweighted, fusible-link damper, if required.